




• Bulk drinking troughs model F



• Heating element for mounting below the drinking trough

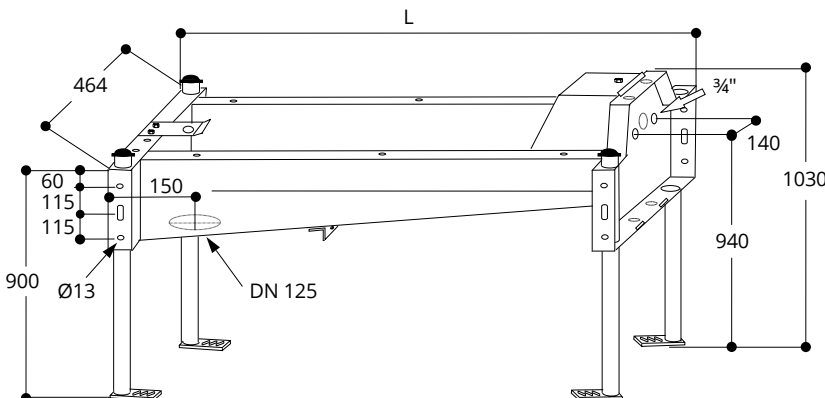

• Dimensions of drinking troughs, model F

Bulk drinking troughs, frost-protected, model F

Frost in open freestall systems may occur in colder regions. In that event, the animals must still be able to drink. The bulk drinking troughs model F can be fitted with frost protection.

This frost protection consists of a heating element mounted under the drinking trough. It gives frost protection up to approximately -20°C.

The supply line can also be heated by coiling a thermocable around it.

Heating element and thermocable must be connected in parallel to a suitable transformer.

Suitable for wall mounting; floor mounting is also possible with a leg set (49 cm width incl. leg set).

The bulk drinking troughs model F:

- Made from stainless steel;
- With rounded corners and sloping bottom;
- With built-in float, float cover opens easily with no tools;
- Possibility of adding a low-pressure float;
- Side connection water supply;
- The cover plate can be used to conceal the connecting pipes.

Model	length (cm)	width (cm)	capacity approx. (l.)
F 140	140	47	100
F 190	190	47	130
F 230	230	47	160
F 285	285	47	200

Bulk drinking troughs frost-protected

- 06.66.014** Bulk drinking trough model F 140, holds approx. 100 litres
- 06.66.019** Bulk drinking trough model F 190, holds approx. 130 litres
- 06.66.024** Bulk drinking trough model F 230, holds approx. 160 litres
- 06.66.029** Bulk drinking trough model F 285, holds approx. 200 litres

Accessories

- 06.66.030** Set of 4 legs, drinking trough model F
- 06.60.738** Low-pressure float
- 06.66.774** Cover plate for connecting pipes

Heating elements, 1 per bulk drinking trough

- 06.66.060** Heating element 24V, 180W, for F 140, mounted below the drinking trough
- 06.66.061** Heating element 24V, 180W, for F 190, mounted below the drinking trough
- 06.66.062** Heating element 24V, 360W, for F 230 and F 285, mounted below the drinking trough

Transformers; 1 per bulk drinking trough

- 06.60.390** Transformer 230/24V, 200W, for F 140 and F 190
- 06.60.392** Transformer 230/24V, 400W, for F 230 and F 285

Option

- 06.60.861** Thermocable for heating the supply line
- 06.60.863** Thermocable 24V, 20W, 2 metres
- 06.60.863** Thermocable 24V, 20W, 3 metres