



- Openline safety feed front Rubos.



- Openline Swedish feed front

Openline self-locking feed fronts


As the word 'Openline' suggests, these are feed fronts with an open top; the head goes in from the top. These are the Swedish feed fronts that have been known for many years. Ideal for animals with horns.

All Openline feed fronts are self-locking with central controls and have an enlarged movable bar to prevent collars from being caught.


Based on the demand for a more robust and larger version, Spinder developed this type of fence into the heavy Rubos version; with built-in safety function and silencer. The feed opening width is 70 cm to suit large cows.

The operating modes of the feed front:

- Opened position; the animals can freely move their heads in and out of the feed front;
- From a central point, setting the feed front on self-locking to make the animals lock up themselves as soon as they start feeding;
- Centrally releasing all positions;
- Individually releasing an animal by sliding up a drop pin into the movable bar;
- For Rubos only: individually releasing an animal from the safety opening (bottom opening) by sliding up a drop pin into the movable bar.

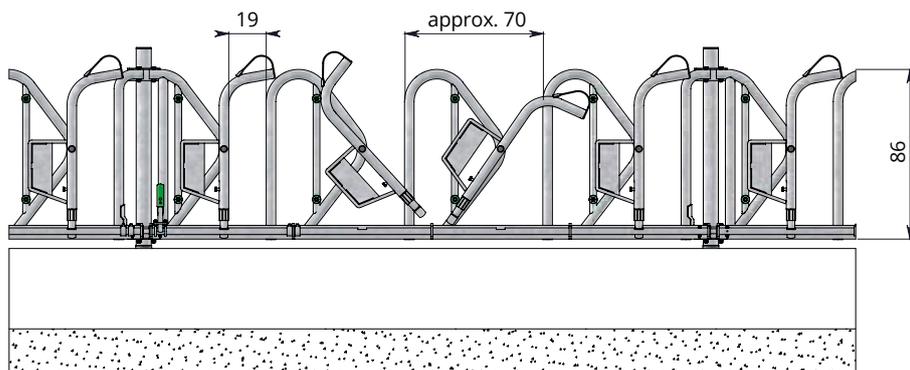


Sectional view installed feed front

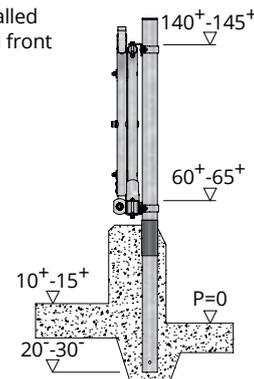


	Length (center to center)	Feeding place width
02.30.500	355 cm* (5 feed openings)	approx. 70 cm
02.30.400	285 cm (4 feed openings)	approx. 70 cm
02.30.300	215 cm° (3 feed openings)	approx. 70 cm
02.30.200	145 cm° (2 feed openings)	approx. 70 cm

* An extra support post needs to be placed per element.
Assembly drawing on application.
° Can be used as a gate.

	Fittings
10.25.180	Support post 76 mm x 180 cm
11.02.250	Plastic protective sleeve 76 mm
10.26.160	Floor-mounted support post 76 mm x 160 cm
11.06.250	Stopper 76 mm
02.91.100	Set of feed front fasteners 76 mm
02.92.100	Operating handle
02.90.305	Hinge assembly for gate

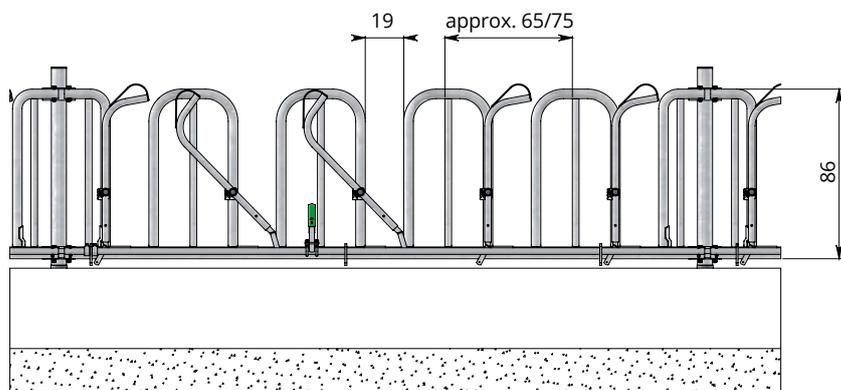

Sectional view installed feed front



Age approx. 22 months and up. Neck width 19 cm.

	Length (center to center)	Feeding place width
02.32.500	325 cm (5 feed openings)	approx. 65 cm
02.32.400	261 cm (4 feed openings)	approx. 65 cm
02.32.360	250 cm (4 feed openings)	approx. 65 cm
02.32.300	196 cm (3 feed openings)	approx. 65 cm
02.32.260	180 cm (3 feed openings)	approx. 65 cm

	Fittings
10.25.180	Support post 76 mm x 180 cm
11.02.250	Plastic protective sleeve 76 mm
10.26.160	Floor-mounted support post 76 mm x 160 cm
11.06.250	Stopper 76 mm
02.91.100	Set of feed front fasteners 76 mm
02.92.100	Operating handle
02.90.380	Hinge assembly for gate
02.90.950	Castor wheel (for gates longer than 2 m)

	Length (center to center)	Feeding place width
02.33.400	300 cm (4 feed openings)	approx. 75 cm
02.33.320	250 cm (3 feed openings)	approx. 75 cm
02.33.300	225 cm (3 feed openings)	approx. 75 cm
02.33.200	150 cm (2 feed openings)	approx. 75 cm